



Corrigendum

Corrigendum to "A comparative evaluation of design factors on bubble column operation in photosynthetic biogas upgrading" [Biofuel Res J 8(2) (2021) 1351-1373]

Archishman Bose<sup>1,2</sup>, Richard O’Shea<sup>1,2,\*</sup>, Richen Lin<sup>1,2</sup>, Jerry D. Murphy<sup>1,2</sup>

<sup>1</sup>Environmental Research Institute, MaREI Centre, University College Cork, Cork, Ireland.

<sup>2</sup>School of Engineering and Architecture, University College Cork, Cork, Ireland.

The authors of the above-referenced paper regret that there was an error with Figure 6 in the manuscript when originally submitted for publication. The correct version of Figure 6 is given below. The caption for Figure 6 in the manuscript is correct and is repeated below for reference.

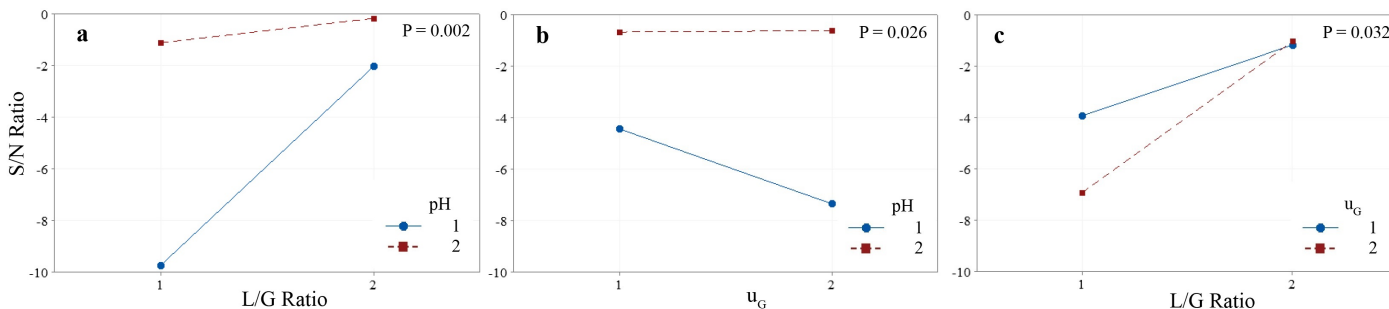


Fig. 6. Interactive effects between (a) pH and L/G ratio; (b) superficial gas velocity ( $u_G$ ) and pH; and (c) superficial gas velocity ( $u_G$ ) and L/G ratio on CO<sub>2</sub> removal efficiency.

DOI of original article: [10.18331/BRJ2021.8.2.2](https://doi.org/10.18331/BRJ2021.8.2.2)  
 \* Corresponding author at: Tel.: +353 21 490 1971  
 E-mail address: [richard.oshea@ucc.ie](mailto:richard.oshea@ucc.ie)

Please cite this article as: Bose A., O’Shea R., Lin R., Murphy J.D. Corrigendum to "A comparative evaluation of design factors on bubble column operation in photosynthetic biogas upgrading" [Biofuel Res J 8(2) (2021) 1351-1373]. Biofuel Research Journal 32 (2021) 1550. DOI: [10.18331/BRJ2021.8.4.5](https://doi.org/10.18331/BRJ2021.8.4.5)